

INNOVATION  
QUALITY  
RELIABILITY

## PELITA GRAPHICS SUPPLIES

📍 Jln. Mesjid No. 165  
Kesawan-Medan

☎ 0852-7510-3333

# LEXIA

PROFESSIONAL  
PRINTING AND  
FINISHING  
SOLUTIONS



**LEXIA**

<https://www.lexia.co.id/>

# Laminating Machine Hydraulic

## H390

Easy to operate.  
Suitable for all  
kind of paper &  
sticker

**2 Machine Type :**  
**H390A**  
with Rewinder

**H390C**  
Autocut with  
overlap function



| Technical Specification       |                                |
|-------------------------------|--------------------------------|
| Max Width of Coating          | 350mm                          |
| Max Coating Thickness         | 5mm                            |
| Diameter of Heating Steel Rod | 125mm                          |
| Diameter of Heating Stick     | 80mm                           |
| Coating Speed                 | 0-7m/min                       |
| Coating Temperature           | 80-125°C                       |
| Total Power                   | 1.8KW                          |
| Net Weight                    | 150kg (H390A)<br>180kg (H390C) |

# Laminating Machine Hydraulic

## H520C

Autocut with  
overlap function



|                               |       |                            |       |                     |           |
|-------------------------------|-------|----------------------------|-------|---------------------|-----------|
| Max Width of Coating          | 500mm | Diameter of Heating Stick  | 120mm | Coating Speed       | 0-13m/min |
| Max Coating Thickness         | 5mm   | Diameter of Discharge Cots | 50mm  | Coating Temperature | 80-125°C  |
| Diameter of Heating Steel Rod | 150mm | Total Power                | 3.5KW | Net weight          | 260kg     |

# Laminating Machine

## 375B

Easy to operate.  
Suitable for all  
kind of paper &  
sticker



|                               |            |                            |        |                     |            |
|-------------------------------|------------|----------------------------|--------|---------------------|------------|
| Max Width of Coating          | 340mm      | Diameter of Heating Stick  | 50mm   | Coating Speed       | 0-6.5m/min |
| Max Coating Thickness         | 4mm        | Diameter of Discharge Cots | 39mm   | Coating Temperature | 70-125°C   |
| Diameter of Heating Steel Rod | 73mm       | Total Power                | 1.98KW | Net weight          | 70kg       |
| Overall Dimensions            | 65x57x99cm |                            |        |                     |            |



# Laminating Machine

## S-390B



Contol Panel



Slitting



Perforating




|                        |                    |                    |                                                   |                       |            |                      |              |
|------------------------|--------------------|--------------------|---------------------------------------------------|-----------------------|------------|----------------------|--------------|
| Max Laminating Width   | 370mm              | Total Power        | 2000W                                             | Paper Thickness       | 125-350gsm | Conveyor Belt Number | 3            |
| Operating Speed        | 13m/min            | Temperture Control | Upper/lower temperature are controlled separately | Feeding Mode          | Manual     | Voltage              | 220V 50/60Hz |
| Laminating Temperature | 90-120°            | Upper Heating Roll | Steel roll (standard)                             | Slitting Function     | Yes        | Rewinder             | Optional     |
| Control Panel          | Digital LED system | Lower Heating Roll | Rubber roll                                       | Anti-curling Function | Yes        | Dismension s (LxWxH) | 90x56x126cm  |

# Perfect Binder

With side glue

## S-50G/60G



Cover position stopper



Big glue tank




| Model                  | 50G (A4)                  | 60G (A3)          |
|------------------------|---------------------------|-------------------|
| Max Book Size (Spine)  | 340mm/13.39" (F4)         | 440MM/17.32" (A3) |
| Side Glue Device       | Yes                       |                   |
| Binding Capacity       | 60mm/2.36"                |                   |
| Cycle Speed (per hour) | 480 books                 |                   |
| Cover Thickness        | 70-350 gsm                |                   |
| Slitting               | Mill Cutter + Comb Cutter |                   |
| Pre-heating            | 30 Minutes                |                   |
| Total Power            | 1500W                     | 2000W             |
| Dimensions (WxDxH)     | 126x75x127cm              | 146x75x127cm      |
| Power Supply           | 220V                      |                   |
| Weight (kg)            | 200                       | 260               |

# Perfect Binder

With Side Glue

## S-50B/60B

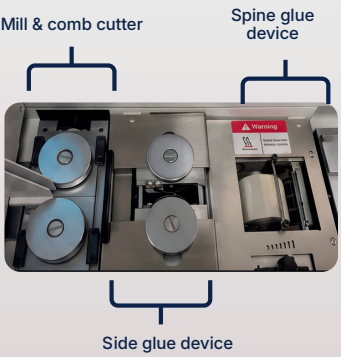



| Model                  | 50B (A4)                  | 60B (A3)     |
|------------------------|---------------------------|--------------|
| Max Book Size (Spine)  | 340mm (F4)                | 460mm(A3)    |
| Side Glue Device       | Yes                       |              |
| Binding Capacity       | 60mm/2.36"                |              |
| Cycle Speed (per hour) | 400 books                 |              |
| Cover Thickness        | 70-300 gsm                |              |
| Slitting               | Mill Cutter + Comb Cutter |              |
| Pre-heating            | 30 Minutes                |              |
| Total Power            | 1100W                     | 1500W        |
| Dimensions (WxDxH)     | 118x52x95cm               | 149x60x102cm |
| Power Supply           | 110V / 220V               |              |
| Weight (kg)            | 190                       | 260          |

# Perfect Binder

# F04



| Technical Specification                                                            |                        |                |
|------------------------------------------------------------------------------------|------------------------|----------------|
|  | Max Binding Length     | 34 cm (F4)     |
|  | Max Binding Thickness  | 4 cm           |
|  | Binding Efficiency     | 200 books/hour |
|  | Duration for Glue Melt | 40 menit       |
|  | Power                  | 500 W          |

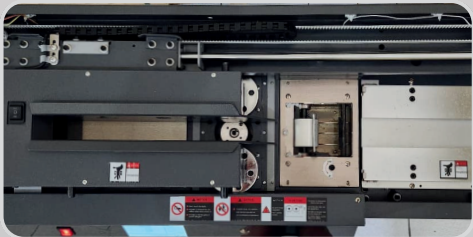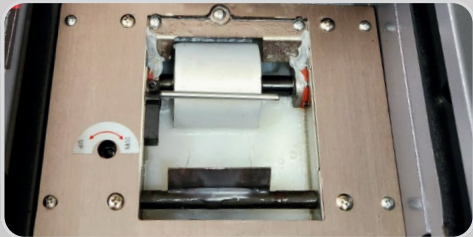



# Hydraulic Paper Cutting Machine

## HP5310




|                       |                                   |                          |                                                   |                        |                                 |
|-----------------------|-----------------------------------|--------------------------|---------------------------------------------------|------------------------|---------------------------------|
| Max Cutting Width     | 530mm                             | Minimum Cutting Width    | 40 mm                                             | Paper Pushing          | Ball screw + double guide rails |
| Cutting Thickness     | 0.1-100 mm                        | Accuracy                 | ±0.2 mm                                           | Power                  | 2200W                           |
| Display               | 10-inch LCD screen                | Control                  | Hydraulic                                         | Packaging Method       | Wooden box                      |
| Paper Pressing Method | Hydraulic + Mechanical foot pedal | Safety Protection        | Suspended electric grid photoelectrics protection | Machine Packaging Size | 134*107*160 cm                  |
| Program               | 100 Time/ 100 Groups              | Machine Packaging Weight | 450kg                                             | Machine Unfold Size    | 92*122*148 cm                   |
| Blade Material        | Alloy high-speed steel            |                          |                                                   |                        |                                 |

# Hydraulic Paper Cutting Machine

## HP4908



Double hydraulic, enlarged motor, enlarged cylinder



Ball screw + double guide rail. Cutting accuracy 0.2 mm



Six-way suspended photoelectric system for enhanced protection



Hydraulic oblique cutting design. Can cut 8 cm cuts without rough edges




### Technical Specification


|                       |                                   |                   |                                      |
|-----------------------|-----------------------------------|-------------------|--------------------------------------|
| Max Width             | 490 mm                            | Minimum Width     | 40 mm                                |
| Thickness             | 0.1-80 mm                         | Accuracy          | ±0.2 mm                              |
| Operation             | 7" Touched screen                 | Control           | Hydraulic                            |
| Paper Pressing Method | Hydraulic + Mechanical foot pedal | Protection        | Six suspended photoelectrics sensors |
| Program               | 100 Time/ 100 Sets                | Paper Feed Method | Ball screw + Double guide rails      |
| Voltage               | 220V/110V                         | Power             | 1500W                                |
| Weight                | 365kg                             | Package           | Wooden case                          |
| Package Size          | 134x97x158 cm                     | Unfold Size       | 117x84x142 cm                        |

# Electric Cutting Machine

## S-4908



Duo-sided shaft design  
assuring precision



Angle-adjustable 7" big  
touchpad



Adjustable cutting depth  
from the outside of cutter



Deactivatable lower IR beam  
Suitable for long paper



Safe & simple  
replacement of cutting  
stick



Electronic hand wheel  
for fine-adjustment




European style control panel  
Key lock for safety  
Two-handed clamping buttons  
Two-handed cutting buttons

|                |              |                       |                |
|----------------|--------------|-----------------------|----------------|
| Cutting Width  | 490mm/19.29" | Cutting Depth         | 490mm/19.29"   |
| Cutting Height | 80mm/3.15"   | Dimensions<br>(HxWxD) | 1240x760x930mm |
| Narrow Cut     | 40mm/1.57"   | Weight                | 140kg          |

# Cutting Machine

## 4606Z

| Technical Specification |           |
|-------------------------|-----------|
| Max Cutting Width       | 460mm     |
| Max Cutting Length      | 460mm     |
| Max Cutting Thickness   | 60mm      |
| Paper Clamping Mode     | Automatic |
| Paper Pushing Mode      | Manual    |
| Safety Protection       | Infrared  |
| Power Supply            | 1.4 KW    |
| Voltage/Frequency       | 220V/50HZ |
| Net Weight              | 120kg     |

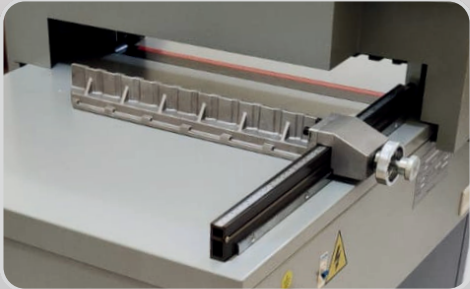

# Single Head Wire Stapler

# 801

Equiped with a Hohner head that deliver strong, stable and precise stapling.



### Dual Function & Wide Application

This machine supports both saddle and side stitching, with an easy-to-operate cabinet design and high efficiency. Ideal for binding books, magazines, and booklets.

|               |                                  |                   |                                    |
|---------------|----------------------------------|-------------------|------------------------------------|
| Binding Speed | 0-80 times/min                   | Binding Thickness | 0.2-5mm                            |
| Wire Side     | 25# 26#<br>(Diameter 0.55/0.5mm) | Power             | 220V/50HZ/100W                     |
| Nail Width    | 13mm                             | Machine Size      | 500x400x600mm                      |
| Weight        | 26kg                             | Binding Way       | Saddle Stitching<br>Side Stitching |




# Double Head Wire Stapler

# 802

Equipped with a Hohner head that deliver strong, stable and precise stapling.

The distance between the two heads can be changed at will, the max is 11cm and the min is 4.9cm

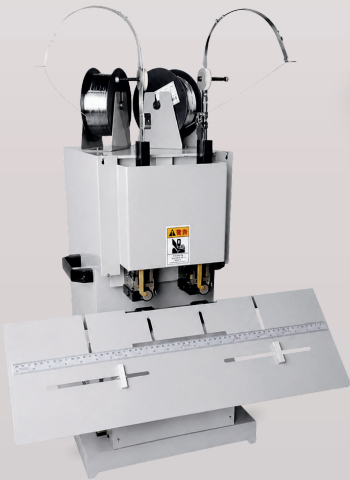

### Dual Function & Wide Application

This machine supports both saddle and side stitching, with an easy-to-operate cabinet design and high efficiency. Ideal for binding books, magazines, and booklets.

|               |                                  |                   |                                    |
|---------------|----------------------------------|-------------------|------------------------------------|
| Binding Speed | 0-80 times/min                   | Binding Thickness | 0.2-5mm                            |
| Wire Side     | 25# 26#<br>(Diameter 0.55/0.5mm) | Power             | 220V/50HZ/120W                     |
| Nail Width    | 13mm                             | Machine Size      | 500x600x600mm                      |
| Weight        | 70kg                             | Binding Way       | Saddle Stitching<br>Side Stitching |

# Electric Creasing Machine


## 660E



Spince creasing wheels



Creasing wheels for folding



Slitting wheels



Perforating wheels


|                   |         |               |                  |                |                 |
|-------------------|---------|---------------|------------------|----------------|-----------------|
| Max Feeding Width | 650mm   | Feeding Speed | 4000 sheets/hour | Machine Size   | 1000x300x600 mm |
| Paper Weight      | 85-400g | Motor Power   | 120W             | Machine Weight | 64KG            |
| Feeding Model     | Manual  |               |                  |                |                 |

# Paper Drill Machine

## 50L

**Best choice for tag,  
leather and book binding**

- Programmable bar for multiple drilling option
- Compatible with drill bits from 3 mm to 10 mm
- Professional design to prevent paper waste jamming
- Custom hole configurations available on demand
- Automatic paper centering system
- Optional table attachment for tag applications

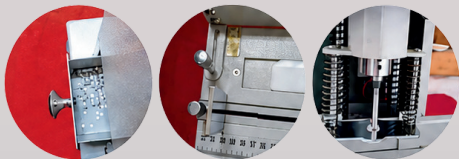

| Technical Specification |               |
|-------------------------|---------------|
| Drill Capacity          | 50mm          |
| Max. Paper Size         | 460x290mm     |
| Drill Margin            | 5-45mm        |
| Machine Size            | 500x500x480mm |
| Net Weight              | 27kg          |

# Pneumatic Grooving Machine

# 720A



|                     |                             |                       |                                   |
|---------------------|-----------------------------|-----------------------|-----------------------------------|
| Auto Postition Size | 720mm                       | Corner Cutting Height | 8cm (standard)<br>15cm (increase) |
| Apply For           | cardboard/MDF/<br>greyboard | Power/Air Pressure    | 220V/0.6mpa                       |
| Grooving Thickness  | 1-5mm                       | Machine Weight        | 110kg                             |
| Grooving Angle      | 90/120/145°                 | Dimension (LxWxH)     | 140x45x97cm                       |

# Smart Paper Grooving/ Slitting Machine

## KX-800



|                    |          |                   |               |
|--------------------|----------|-------------------|---------------|
| Auto Position Size | 20-500mm | Grooving Angle    | 90/120/145°   |
| Paper Slotting     | Yes      | Machine Weight    | 120kg         |
| Grooving Thickness | 1-5mm    | Dimension (LxWxH) | 105x100x105cm |
| Grooving length    | 0-800mm  |                   |               |